




AGRICULTURAL TIRE&WHEELRIM



www.tnr-international.com



TRACTOR

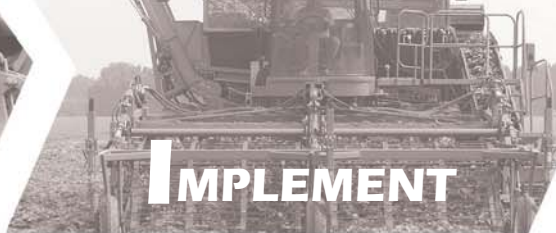

IMPLEMENT



IRRIGATION

INDEX



- Drive Bias R1 1
- Drive Bias R2 7
- Drive Bias R3 9
- Drive Bias R4 9
- Steer Bias F1 10
- Steer Bias F2 10
- Bias I1 11
- Drive Bias G1 11
- Drive Bias G2 11
- Tractor Front LUG 12
- Harsh Road IM2 12
- Bias IMP 12
- Tractor Wheel 19



- Drive Bias R1 13
- Drive Bias R2 13
- Drive Bias R4 14
- Steer Bias F1 14
- Steer Bias F2 14
- Implement I3 15
- Drive Bias G1 15
- Bias IMP 15
- Implement Wheel 23



- Drive Bias R1 16
- Drive Bias R2 16
- Irrigation WR1 17
- Irrigation Wheel 24



AGRICULTURAL TIRE





AGRICULTURAL TIRE

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
6.00-12	6	TT		22.0	0.87	4.50E	5.00F	165	6.50	640	25.20	405	250
7.50-16	6	TT		25.0	0.98	5.00F	6LB	205	8.10	810	31.90	650	210
7.50-18	6	TT		14.0	0.55	5.50F	---	203	7.99	850	33.46	950	225
	8											1135	270
7.50-20	6	TT		25.0	0.98	5.50F	5.00F	205	8.10	910	35.80	760	210
9.5-24	6	TT		30.0	1.18	W8	W8H, W7	241	9.50	1049	41.30	850	210
11-38	6	TT		32.0	1.26	W10	DW10	305	12.01	1540	60.63	1400	140
	8											1545	160
12.4-28	6	TT		34.0	1.34	W11	W10, W10H	315	12.40	1260	49.61	1275	170
	8											1510	230
	10											1700	280
	12											1830	320
13.6-28	6	TT		37.0	1.46	W12	W11	345	13.58	1310	51.55	1430	160
	8											1645	200
	10											1910	250
	12											2125	300
15-24	10	TT		38.0	1.50	W14	---	410	16.10	1330	52.40	2800	280
15.5-38	8	TT		36.0	1.42	W14L	DW14A	395	15.60	1570	61.80	2060	180
	8											2000	170
16.9-30	10	TT		39.5	1.56	W15L	W14L, DW14A	429	16.90	1486	58.50	2240	190
	12											2440	220
16.9-34	6	TT		36.0	1.42	W15L	DW14A	429	16.90	1585	62.40	1800	120
	8											2120	170
	10											2360	190
16.9-38	8	TT		43.0	1.69	W15L	DW14A	430	16.90	1685	66.30	2240	170
	100											2450	190
	14											2940	260
18.4-30	6	TT		37.0	1.46	W16L	W15L, DW16	467	18.39	1550	61.02	2120	110
	8											2415	140
	10											2815	180
	12											3180	230
18.4-34	6	TT		37.0	1.46	W16L	W15L, DW16	467	18.39	1655	65.16	2250	110
	8											2565	140
	10											2990	180
	12											3375	230
18.4-38	14	TT		37.0	1.46	W16L	W15L	467	18.39	1755	69.09	3630	260
	6											2380	110
	8											2715	140
	10											3165	180
20.8-38	12	TT		50.5	2.00	W18A	18D, DW18A	528	20.80	1834	72.20	3575	230
	8											3840	260
	10											2800	120
	12											3150	150
23.1-26	10	TT		54.0	2.13	DW20A	---	587	23.10	1603	63.10	3550	190
	12											2900	140
	16											3250	170
												3860	220



TR19

Drive Bias R1



AGRICULTURAL TIRE

Drive Bias R1



TR21

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
5.50-17	6	TT		22.0	0.87	4.00E	---	138	5.43	750	29.53	400	280
6.00-12	6	TT		20.0	0.79	4.50E	5.00F	165	6.50	640	25.20	405	250
	8											450	300
6.00-16	6	TT		30.0	1.18	4.50E	5.00F	165	6.50	745	29.33	495	250
	8											550	300
6.50-16	6	TT		24.0	0.94	5.00F	4.50E、 5.50F	180	7.09	765	30.12	565	250
	8											620	300
7.50-16	6	TT		25.0	0.98	5.50F	5.00F、 6LB	205	8.07	810	31.89	650	210
	8											730	260
7.50-20	6	TT		24.0	0.94	5.50F	5.00F、 6.00F	205	8.07	910	35.83	760	210
	8											860	260
8.3-20	6	TT		28.0	1.10	W7	W7	210	8.27	895	35.24	695	240
	8											785	300
8.3-24	6	TT		28.0	1.10	W7	W7	210	8.27	995	39.17	810	240
	8											920	300
9.5-20	6	TT		25.0	0.98	W8	W8	240	9.45	950	37.40	810	210
	8											955	280
9.5-24	6	TT		30.0	1.18	W8	W8	240	9.45	1050	41.34	940	210
	8											1110	280
11.2-24	4	TT		34.0	1.34	W10	---	284	11.18	1103	43.43	750	130
	6											950	180
11.2-28	4	TT		30.0	1.18	W10	---	284	11.18	1205	47.44	800	130
	6											1000	180
12-38	8	TT		35.0	1.38	DW11	---	330	12.99	1575	62.01	1570	140
12.4-24	8	TT		34.0	1.34	W11	---	315	12.40	1159	45.63	1285	220
12.4-28	4	TT		34.0	1.34	W11	---	315	12.40	1260	49.61	900	110
	6											1150	170
13.6-28	6	TT		34.0	1.34	W12	---	345	13.58	1311	51.61	1285	150
	8			33.0	1.30							1500	190
14.9-24	4	TT		35.0	1.38	W13	---	378	14.88	1265	49.80	1210	100
	6											1360	140
14.9-28	6	TT		35.0	1.38	W13	---	378	14.88	1367	53.82	1450	140
	8											1600	180
15.5-38	8	TT		36.0	1.42	W14L	---	394	15.51	1569	61.77	1850	180
	10									1570	61.81	2320	230
16.9-24	6	TT		39.0	1.54	W15L	---	429	16.89	1333	52.48	1550	120
16.9-30	8	TT		38.0	1.50	W15L	---	429	16.89	1485	58.46	2000	170
16.9-38	8	TT		36.0	1.42	W15L	---	429	16.89	1685	66.34	2520	170
	10											2180	140
18.4-30	8	TT		39.0	1.54	W16L	---	467	18.39	1552	61.10	2815	180
	10											2300	140
18.4-34	8	TT		41.0	1.62	W16L	---	467	18.39	1654	65.12	2990	180
	10			38.0	1.50							2430	140
18.4-38	8	TT		38.0	1.50	W16L	---	467	18.39	1755	69.09	3165	180
	10											2800	120
20.8-38	8	TT		51.0	2.01	18	---	528	20.79	1834	72.20	2800	120



AGRICULTURAL TIRE

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
13.6-24	6	TT		35.0	1.38	W12	W11, DW12	345	13.58	1210	47.64	1340	160
	8											1545	200
	10											1790	250
13.6-38	6	TT		35.0	1.38	W12	W11, DW11, DW12	345	13.58	1565	61.61	1660	160
	8											1910	200
	10											2215	250
14.9-24	6	TT		33.0	1.30	W13	W12, DW12	378	14.88	1265	49.80	1510	140
	8											1760	180
	10											1990	230
14.9-28	8	TT		38.0	1.50	W13	---	378	14.88	1365	53.74	1880	180
	10											2120	230
	12											2300	280
14.9-30	8	TT		38.0	1.50	W13	---	378	14.88	1415	55.71	1940	180
15.5-38	6	TT		37.0	1.46	W14L	DW14	395	15.55	1570	61.81	1765	130
	8											2060	200
	10											2320	230
16.9-24	6	TT		37.0	1.46	W15L	DW14, W14L	430	16.93	1335	52.56	1725	130
	8											2040	170
	10											2230	200
16.9-28	6	TT		37.0	1.46	W15L	DW14, W14L	430	16.93	1435	56.50	2410	230
	8											1840	130
	10											2175	170
16.9-30	6	TT		37.0	1.46	W15L	DW14, W14L	430	16.93	1485	58.46	2380	200
	8											2580	230
	10											1900	130
16.9-34	6	TT		39.0	1.54	W15L	DW14, W14L	430	16.93	1585	62.40	2245	170
	8											2455	200
	10											2730	240
16.9-38	6	TT		44.0	1.73	W15L	DW14, W14L	430	16.93	1685	66.34	2015	130
	8											2380	170/
	10											2605	200
18.4-34	6	TT		37.0	1.46	W16L	W15L, DW16	467	18.39	1655	65.16	2820	230
	8											2950	250
	10											2130	130
18.4-38	6	TT		37.0	1.46	W16L	W15L	467	18.39	1755	69.09	2250	110
	8											2520	170
	10											2565	140
18.4-42	6	TT		37.0	1.46	W16L	W15L	467	18.39	1857	73.11	2990	230
	8											3130	250
	10											3630	260
20.8-38	6	TT		40.0	1.57	W18L	---	528	20.79	1835	72.24	2380	110
	8											2715	140
	10											3165	180
23.1-26	6	TT		40.0	1.57	DW20	---	587	23.11	1705	67.13	3575	230
	8											3840	260
	10											3900	280
23.1-30	6	TT		40.0	1.57	DW20	---	587	23.11	1605	63.19	2575	140
	8											3000	180
	10											3400	220
23.1-30	8	TT		40.0	1.57	DW20	---	587	23.11	1605	63.19	3660	250
	10											3900	280
	12											3090	130
23.1-30	8	TT		40.0	1.57	DW20	---	587	23.11	1605	63.19	3475	160
	10											4000	200
	12											4450	240
23.1-30	8	TT		40.0	1.57	DW20	---	587	23.11	1605	63.19	4860	280
	10											3035	110
	12											3460	140
23.1-30	8	TT		40.0	1.57	DW20	---	587	23.11	1605	63.19	3850	170
	10											2850	110
	12											3245	140
23.1-30	8	TT		40.0	1.57	DW20	---	587	23.11	1605	63.19	3610	170
	10											3970	200
	12												

Drive Bias R1



TR47



AGRICULTURAL TIRE

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
10.0-15	6	TT		22.0	0.87	9.00X15.3	---	260	10.24	760	29.92	755	230
	8											950	310
	10											1090	390
	12											1180	470
15-24	10	TT		33.0	1.30	DW14	W14	410	16.14	1330	52.36	2800	280
	12											3020	320
	14											3160	350
16/70-20	10	TT		33.0	1.30	13.0/1.0	---	410	16.14	1075	42.32	2310	250



TR48

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
11.2-28	6	TT		35.0	1.38	W10	W9、W10H	285	11.22	1205	47.44	1115	180
	8											1305	240
	10											1500	300
12-38	8	TT		38.0	1.50	DW11	W11	330	12.99	1575	62.01	1570	140
	10											1760	200
	12											1950	240
14.9-26	6	TT		36.0	1.42	W13	W12、DW12	378	14.88	1315	51.77	1560	140
	8											1820	180
	10											2055	230
14.9-28	6	TT		38.0	1.50	W13	W12	378	14.88	1365	53.74	1610	140
	8											1880	180
	10											2120	230
	12											2370	280
14.9-30	6	TT		38.0	1.50	W13	W12、DW12	378	14.88	1415	55.71	1665	140
	8											1940	180
	10											2190	230
18.4-26	6	TT		37.0	1.46	DW16	W15L	467	18.39	1450	57.09	1990	110
	8											2265	140
	10											2645	180
	12											2985	230



TR58

Drive Bias R1



AGRICULTURAL TIRE

Drive Bias R1



TR59

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
8.3-24	4	TT	TL	31.5	1.25	W7	---	211	8.31	993	39.10	560	150
	4											670	140
9.5-24	6	TT	TL	30.0	1.18	W7	W8、W8H	241	9.49	1048	41.26	850	210
	8											1005	280
10/75-15.3	10	TT	TL	30.0	1.18	9.00	---	264	10.39	910	35.83	1525	390
11.2-20	6	TT	TL	30.0	1.18	W10	W9、W10H	285	11.22	1005	39.57	920	180
	8											1085	240
11.2-24	6											1045	180
	8	TT	TL	33.0	1.30	W10	W9、W10H	285	11.22	1105	43.50	1225	240
12.4-24	10											1380	300
	6	TT	TL	34.0	1.34	W11	W10、W10H	315	12.40	1160	45.67	1200	170
12.4-28	8											1415	230
	10	TT	TL	34.0	1.34	W11	W10、W10H	315	12.40	1260	49.61	1510	230
12.4-32	12											1700	280
	4											1830	320
12.4-32	6	TT	TL	36.0	1.42	W11	W10	315	12.40	1360	53.54	1070	110
	8											1355	170
13.6-24	10											1605	230
	4											1800	280
13.6-28	6	TT	TL	36.5	1.44	W11	W12	345	13.58	1210	47.64	925	100
	8											1215	150
13.6-38	4											1400	190
	6	TT	TL	36.5	1.44	W11	W12	345	13.58	1311	51.61	1000	100
14.9-24	8											1285	150
	4											1150	100
14.9-28	6	TT	TL	36.5	1.44	W12	DW12A、W11	345	13.58	1565	61.61	1500	150
	8											1800	210
14.9-28	4											1090	100
	6	TT	TL	37.0	1.46	W12	W13	378	14.88	1265	49.80	1360	140
15.5-38	8											1600	140
	6	TT	TL	37.0	1.46	W12	W13	378	14.88	1367	53.82	1450	140
16.9-24	8											1700	180
	6	TT	TL	37.0	1.46	W14L	DW14A	394	15.51	1569	61.77	1600	140
16.9-30	8											1850	180
	6	TT	TL	39.0	1.54	W15L	W15L	429	16.89	1333	52.48	1550	120
18.4-30	10											1850	170
	6	TT	TL	39.0	1.54	W15L	DW15A、 DW14A、 W14L	429	16.89	1485	58.46	1700	120
18.4-34	8											1900	110
	6	TT	TL	40.0	1.57	DW16A	W15L、DW15A	467	18.39	1552	61.10	2180	140
18.4-38	10											2500	180
	6	TT	TL	40.0	1.57	DW16A	W16L、W15L	467	18.39	1654	65.12	2000	110
20.8-38	8											2300	140
	6	TT	TL	40.0	1.57	W16A	W15L、16DD	467	18.39	1755	69.09	2120	110
23.1-26	10											2430	140
	8	TT	TL	41.9	1.65	W18A	18DD、DW18A	528	20.79	1834	72.20	2800	120
23.1-26	12											3150	150
	16	TT	TL	54.0	2.13	DW20A	---	587	23.11	1603	63.11	2900	140
												3250	170
												3860	210



AGRICULTURAL TIRE

Drive Bias R1



TR66

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
6.00-12	6	TT		22.0	0.87	4.50E	---	165	6.50	640	25.20	405	250
6.00-16	6	TT		24.0	0.94	4.50E	---	165	6.50	745	29.33	495	250
6.50-16	6	TT		25.0	0.98	5.00F	---	180	7.09	765	30.12	565	250
7.50-16	6	TT		23.0	0.91	5.50F	---	205	8.07	810	31.89	650	210
7.50-20	6	TT		26.0	1.02	5.50F	---	205	8.07	910	35.83	760	210
8.3-20	6	TT		26.0	1.02	W7	---	210	8.27	895	35.24	695	240
8.3-24	6	TT		26.0	1.02	W7	---	210	8.27	995	39.17	810	240
9.5-16	6	TT		23.0	0.91	W8	---	240	9.45	860	33.86	800	210
9.5-20	6	TT		33.0	1.30	W8	---	240	9.45	950	37.40	810	210
9.5-24	6	TT		30.0	1.18	W8	---	240	9.45	1050	41.34	940	210
	8											1110	280
10.0-15	8	TT		19.0	0.75	8LB	---	276	10.87	855	33.66	1425	240
10/75-15.3	10		TL	22.0	0.87	9.0	---	264	10.39	760	29.92	1090	390
11-32	6	TT		44.0	1.73	W10	---	305	12.01	1360	53.54	1000	140
11-38	8	TT		46.5	1.83	W10	---	305	12.01	1540	60.63	1630	180
11.2-20	8	TT		33.0	1.30	W10	---	285	11.22	1005	39.57	1085	240
11.2-24	6	TT		25.0	0.98	W10	---	285	11.22	1105	43.50	1045	180
	8											1225	240
11.2-28	6	TT		34.0	1.34	W10	---	285	11.22	1205	47.44	1115	180
	6											950	120
11.2-38	8	TT		25.0	0.98	W10	---	285	11.22	1448	57.01	1150	180
	10											1350	250
12-38	8	TT		35.0	1.38	DW11	---	330	12.99	1575	62.01	1570	140
	10											1800	220
12.4-24	6	TT		36.0	1.42	W11	---	315	12.40	1160	45.67	1200	170
	8											1415	230
12.4-28	6	TT		36.0	1.42	W11	---	315	12.40	1260	49.61	1275	170
	8											1510	230
12.4-32	6	TT		36.0	1.42	W11	---	315	12.40	1360	53.54	1355	170
13.6-24	6	TT		25.0	0.98	W12	---	245	9.65	1210	47.64	1340	160
	8											1545	200
13.6-28	8	TT		33.0	1.30	W12	---	345	13.58	1310	51.57	1645	210
	10											1910	250
13.6-38	10	TT		36.0	1.42	W12	---	345	13.58	1565	61.61	2215	250
14.9-24	6	TT		26.0	1.02	W13	---	378	14.88	1265	49.80	1510	140
	8											1760	180
14.9-26	8	TT		38.0	1.50	W13	---	378	14.88	1315	51.77	1820	180
	10											2055	230
14.9-30	8	TT		38.0	1.50	W13	---	378	14.88	1415	55.71	1940	180
	10											2190	230
15-24	10	TT		35.0	1.38	DW14	---	410	16.14	1330	52.36	2800	280
	12											3100	330
15.5/80-24	12	TT		35.0	1.38	W13	---	394	15.51	1240	48.82	2900	300
	16											3300	400
15.5-38	10	TT		35.0	1.38	W14L	---	395	15.55	1570	61.81	2320	230
16/70-20	10	TT	TL	35.0	1.38	13.0	---	410	16.14	1075	42.32	2300	250
16.9-28	8	TT		39.0	1.54	W15L	---	430	16.93	1435	56.50	2175	170
	10											2380	200
16.9-30	8	TT		40.0	1.57	W15L	---	430	16.93	1485	58.46	2245	170
	10											2455	200
16.9-34	8	TT		39.0	1.54	W15L	---	430	16.93	1585	62.40	2380	170
	10											2605	200
16.9-38	8	TT		39.0	1.54	W15L	---	430	16.93	1685	66.34	2520	170
	10											2760	200
18.4-26	8	TT	TL	38.0	1.50	DW16	---	467	18.39	1450	57.09	2265	140
	12											2985	230
18.4-30	8	TT		41.0	1.61	W16L	---	467	18.39	1550	61.02	2415	140
	10											2815	180
18.4-34	8	TT		38.0	1.50	W16L	---	467	18.39	1655	65.16	2565	140
	10											2990	180
18.4-38	8	TT		41.0	1.61	W16L	---	467	18.39	1755	69.09	2715	140
	10											3165	180
18.4-42	10	TT		51.0	2.01	W16A	---	467	18.39	1857	73.11	3330	180
	12											3750	210
20.8-38	10	TT		42.0	1.65	W18L	---	528	20.79	1835	72.24	3475	160
23.1-26	12	TT		42.0	1.65	DW20	---	587	23.11	1605	63.19	3510	170



AGRICULTURAL TIRE

Drive Bias R1



TR79

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
14.00-38	12		TL	32.0	1.26	W13	---	394	15.51	1262	49.69	3000	300
	14											3300	340
15.5/80-24	8	TT		38.0	1.50	W13	---	355	13.98	1580	62.20	2160	220
18.4-26	10	TT		50.5	1.99	DW16A	---	455	17.91	1450	57.09	2500	180
	14		2810									240	
18.4-30	10	TT	TL	50.5	1.99	DW16A	---	485	19.09	1557	61.30	2450	170
	14											3120	250
18.4-34	8			51.0	2.01	DW16A	---	452	17.80	1694	66.69	2300	140
	14	TT										3300	260
	16		3600									300	
18.4-38	8			41.0	1.61	W16A	W15L、 16DD	467	18.39	1755	69.09	2430	2430
	10	TT										2900	2900
	12		3250									3250	
20.8-38	12			50.5	1.99	W18A	18DD、 DW18A	528	20.79	1834	72.20	3550	3550
	14	TT	TL									3875	3875
	16		4070									4070	
23.1-26	10			63.5	2.50	DW20A	---	569	22.40	1626	64.02	2900	2900
	12	TT	TL									3250	3250
	16		3860									3860	



TR28

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
18.4-34	8	TT		37.0	1.46	DW16A	W16L、 W15L	467	18.39	1654	65.12	2300	140
18.4-38	8	TT		37.0	1.46	W16A	W15L、 16DD	467	18.39	1755	69.09	2430	140

Drive Bias R2



TR50

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
9.5-20	8	TT		60.0	2.36	W8	---	240	9.45	976	38.43	955	280
12.4-24	8	TT		67.0	2.64	W11	---	315	12.40	1192	46.93	1415	230
13.6-38	8	TT		70.0	2.76	W12	---	345	13.58	1600	62.99	1910	210
18.4-34	10	TT		78.0	3.07	W16L	---	467	18.39	1702	67.01	2990	180
	8		1900									140	
19.5L-24	10	TT		92.0	3.62	W17	---	495	19.49	1345	52.95	2120	170
	12		2360									210	
	8		2850									110	
23.1-26	10			89.0	3.50	DW20	---	587	23.11	1660	65.35	3245	140
	12	TT										3610	170
	14		3970									200	
28L-26	10			93.0	3.66	DW25	---	715	28.15	1615	63.58	3460	120
	12	TT										3785	140
	14		4245									170	



AGRICULTURAL TIRE



TR22

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
9.5-24	6	TT		60.0	1.69	W8	W7、 W8H	240	9.45	1150	45.28	1315	240

Drive Bias R2

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
5.50-17	6	TT		50.0	1.97	4.00E	---	138	5.43	798	31.42	400	280
6.00-12	6	TT		50.0	1.97	4.50E	5.00F	165	6.50	690	27.17	425	270
6.50-16	6	TT		60.0	2.36	5.00F	---	170	6.69	810	31.89	600	270
7.50-16	6	TT		63.0	2.48	5.50F	5.00F	200	7.87	895	35.24	650	210
8.3-20	6	TT		62.0	2.44	W7	W6	210	8.27	950	37.40	970	270
8.3-24	6	TT		72.0	2.83	W7	W6	210	8.27	1050	41.34	1135	270
9.5-20	6	TT		70.0	2.76	W8	---	240	9.45	1050	41.34	1140	240
9.5-24	6	TT		80.0	3.15	W8	W7、 W8H	240	9.45	1150	45.28	1315	240
11-32	6	TT		90.0	3.54	W10	DW10	305	12.01	1490	58.66	1080	160
11.2-24	6	TT		82.0	3.23	W10	W9、 W10H	285	11.22	1205	47.44	1465	210
12.00-18	10 12	TT		60.0	2.36	9.00V	---	327	12.87	1090	42.91	1800 1950	350 420
12.4-24	8	TT		85.0	3.35	W11	---	315	12.40	1245	49.02	1980	230
12.4-26	6	TT		83.0	3.27	W11	W10、 10H	315	12.40	1265	49.80	1240	160
12.4/11-28	6	TT		83.0	3.27	W11	W10、 W10H	315	12.40	1315	51.77	1785	200
13.6-38	6 8 10	TT		85.0	3.35	W12	W11、 DW11、 DW12	345	13.58	1710	67.32	2160 2675 2975	160 230 280
14.9-30	10	TT		90.0	3.54	W13	---	378	14.88	1495	58.86	2190	230
16.9-30	8 10	TT		90.0	3.54	W15L	---	430	16.93	1585	62.40	2245 2455	170 200
16.9-34	8 10	TT		90.0	3.54	W15L	DW14、 W14L	430	16.93	1670	65.75	2380 2605	170 200



TR49



AGRICULTURAL TIRE

Drive Bias R3



TR31

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
23.1-26	8	TT	TL	28.0	1.10	DW20A	---	590	23.23	1565	61.61	2575	110
	10											2900	140
	12											3250	170
	16											3860	220
28L-26	10	TT	TL	28.0	1.10	DW20A	---	714	28.11	1591	62.64	3150	120
	12											3350	140
	16											4125	190



TR42

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
19.5L-24	10		TL	27.0	1.06	W16L	---	495	19.50	1314	51.74	3750	190

Drive Bias R4



TR73A

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
7.50-16	6	TT		18.0	0.71	5.50F	---	205	8.07	765	30.12	650	210
12.9-18	10	TT		22.0	0.87	9.00V	---	327	12.87	1090	42.91	1800	350
16.9-24	8		TL	26.0	1.02	W15L	---	430	16.93	1309	51.54	2650	190
	10	2900	220										
16.9-28	12		TL	26.0	1.02	W15L	---	429	16.89	1410	55.51	2380	200
17.5L-24	10		TL	26.0	1.02	W15L	---	445	17.52	1241	48.86	2800	220
	12	3075	160										
19.5L-24	10		TL	30.0	1.18	DW16A	---	495	19.49	1314	51.73	3000	190
	12	3450	230										
21L-24	10		TL	30.0	1.18	DW18A	---	533	20.98	1378	54.25	3350	180
	12	3875	220										



AGRICULTURAL TIRE

Drive Bias R4



TR73

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
16.9-28	10	TL	28.0	1.10	W15L	W14L	430	16.93	1410	55.51	2380	200	
	12										2730	240	



TR78

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
10.5/80-18	8	TL	21.0	0.83	9	---	274	10.79	905	35.63	1710	300	
	10										1935	370	
	10										2375	310	
12.5/80-18	12	TL	24.0	0.94	9	---	308	12.13	985	38.78	2625	370	
	14										2910	430	
	14										3130	490	
	16												

Steer Bias F1



TR32

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
6.00-16	6	TT		14.0	0.55	4.00E	---	160	6.30	740	29.13	560	340
7.50-16	6	TT		19.0	0.75	5.50F	---	205	8.07	810	31.89	745	280

Steer Bias F2



TR23

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
4.00-12	4	TT		8.0	0.31	3.00D	2.5C	110	4.33	535	21.06	250	340
4.00-14	4	TT		10.0	0.39	3.00D	2.5C	110	4.33	590	23.23	270	340
4.00-16	4	TT		12.0	0.47	3.00D	---	110	4.33	640	25.20	300	340
	6											420	380
5.00-15	4	TT		14.0	0.55	3.00D	---	130	5.12	645	25.39	365	280
	6											465	420
5.50-16	6	TT		14.0	0.55	4.00E	4.50E	150	5.91	710	27.95	525	370
	4											450	230
6.00-16	6	TT		14.0	0.55	4.00E	4.50E、5.00F、5K	160	6.30	740	29.13	560	340
	8											675	450
	4											510	230
6.50-16	6	TT		14.0	0.55	4.50E	4.50E、5.00F、5K	175	6.89	760	29.92	615	310
	8											735	420
	4											600	230
6.50-20	6	TT		14.0	0.55	5.00F	4.50E、5.50F	180	7.09	860	33.86	725	310
	8											865	420
	4											605	200
7.50-16	6	TT		21.0	0.83	5.50F	5.00F、5K、6.00F、6LB	205	8.07	810	31.89	745	280
	8											870	370
	4											710	200
7.50-20	6	TT		21.0	0.83	5.50F	5.00F	205	8.07	910	35.83	875	280
	8											1070	370



AGRICULTURAL TIRE

Bias I1



TR26

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load	Inflation
				mm	inch			mm	inch	mm	inch	kg	Kpa
9.5L-15	6/8		TL	7.0	0.28	8LB	---	240	9.45	765	30.12	895	190
10.0-15	6		TL	9.0	0.35	9.00X15.3	---	264	10.39	760	29.92	1100	230
	8	1330										310	
11L-15	6		TT TL	7.0	0.28	W8L	10LB、8LB、W10L	280	11.02	775	30.51	950	170
	8	1130										220	
	10	1285										280	

Drive Bias G1



TR39

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load	Inflation
				mm	inch			mm	inch	mm	inch	kg	Kpa
5.00-12	6		TL	13.0	0.51	3.00D	---	127	5.00	528	20.79	285	360
6.00-14	6		TL	15.0	0.59	5	---	155	6.10	627	24.69	380	290
7.00-14	6		TL	16.0	0.63	5	---	183	7.20	691	27.20	450	250
6.00-16	6		TL	25.0	0.98	4.50E	---	165	6.50	745	29.33	426	290
7.00-16	6		TL	27.0	1.06	6	---	183	7.20	744	29.29	500	250
8.00-16	6		TL	17.0	0.67	6	---	211	8.31	790	31.10	617	195
9.50-16	6		TL	18.0	0.71	8	---	241	9.49	845	33.27	630	210

Drive Bias G2



TR55

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load	Inflation
				mm	inch			mm	inch	mm	inch	kg	Kpa
26X7.5-12	4	TT		7.0	0.28	5.00F	---	205	8.07	640	25.20	455	147
11.2-20	4	TT		10.0	0.39	W10	W9、W10H	295	11.61	995	39.17	785	120



AGRICULTURAL TIRE

Tractor Front LUG



TR8

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load	Inflation
				mm	inch			mm	inch	mm	inch	kg	Kpa
6.50-16	10	TT		10.0	0.39	4.50E	4.00E, 5.00F	173	6.81	735	28.94	1000	530
7.50-16	6	TT		8.0	0.31	5.00F	---	205	8.07	785	30.91	650	210
11.2-20	4	TT		12.0	0.47	W10	---	285	11.22	1005	39.57	760	130
	10											1250	300
12.4-24	6	TT		12.0	0.47	W10	---	315	12.40	1105	43.50	1200	170
13-20	4	TT		10.0	0.39	W12	---	380	14.96	1090	42.91	1050	120
31X9.5-16	4	TT		8.0	0.31	6.00F	---	220	8.66	790	31.10	850	160

Harsh Road IM2



TR69

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load	Inflation
				mm	inch			mm	inch	mm	inch	kg	Kpa
12.00-18	10	TT		19.0	0.75	9.00V	---	327	12.87	1090	42.91	1800	350
	12											1950	420

Bias IMP



TR41

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load	Inflation
				mm	inch			mm	inch	mm	inch	kg	Kpa
10/75-15.3	10	TL		9.0	0.35	9	---	264	10.39	760	29.92	1500	400
	12											1700	470
	14											1900	550
11.5/80-15.3	10	TL		10.0	0.39	10	---	290	11.42	845	33.27	1950	340
	12											2180	410
12.5/80-15.3	14	TL		10.0	0.39	10	---	307	12.09	889	35.00	2430	470
	14											2650	440



AGRICULTURAL TIRE



TR19

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
7.50-16	6	TT		25.0	0.98	5.00F	6LB	205	8.10	810	31.90	650	210



TR21

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
6.00-16	6	TT		30.0	1.18	4.50E	5.00F	165	6.50	745	29.33	495	250
	8											550	300
6.50-16	6	TT		24.0	0.94	5.00F	4.50E, 5.50F	180	7.09	765	30.12	565	250
	8											620	300
7.50-16	6	TT		25.0	0.98	5.50F	5.00F, 6LB	205	8.07	810	31.89	650	210
	8											730	260



TR59

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
10/75-15.3	10	TT	TL	30.0	1.18	9	---	264	10.39	910	35.83	1525	390



TR66

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
6.00-16	6	TT		24.0	0.94	4.50E	---	165	6.50	745	29.33	495	250
6.50-16	6	TT		25.0	0.98	5.00F	---	180	7.09	765	30.12	565	250
7.50-16	6	TT		23.0	0.91	5.50F	---	205	8.07	810	31.89	650	210
10/75-15.3	10		TL	22.0	0.87	9	---	264	10.39	760	29.92	1090	390
11.5/80-15.3	10		TL	24.0	0.94	9	---	290	11.42	845	33.27	1360	350



TR49

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
7.50-16	6	TT		63.0	2.48	5.50F	5.00F	200	7.87	895	35.24	650	210

Drive Bias R1

Drive Bias R2



TRACTOR



IMPLEMENT



IRRIGATION

AGRICULTURAL TIRE

Drive Bias R4



TR73A

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
7.50-16	6	TT		18.0	0.71	5.50F	---	205	8.07	765	30.12	650	210



Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
10.5/80-18	8		TL	21.0	0.83	9	---	274	10.79	905	35.63	1710	300
	10											1935	370

Steer Bias F1



TR32

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
5.00-15	8	TT		19.0	0.75	4J	---	140	5.51	665	26.18	565	530
6.00-16	6	TT		14.0	0.55	4.00E	---	160	6.30	740	29.13	560	340



TR23

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
5.00-15	4	TT		14.0	0.55	3.00D	---	130	5.12	645	25.39	365	280
	6											465	420
6.00-16	4											450	230
	6	TT		14.0	0.55	4.00E	4.50E、5.00F、5K	160	6.30	740	29.13	560	340
6.50-16	8											675	450
	4											510	230
6.50-16	6	TT		14.0	0.55	4.50E	4.50E、5.00F、5K	175	6.89	760	29.92	615	310
	8											735	420

Steer Bias F2



TR33

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
5.00-15	4		TL	13.0	0.51	4J	---	130	5.12	664	26.14	325	300
6.00-16	6	TT	TL	10.0	0.39	4	---	159	6.26	739	29.09	515	360



TRACTOR



IMPLEMENT



IRRIGATION

AGRICULTURAL TIRE

Steer Bias F2



TR34

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
6.00-16	6	TT		13.0	0.51	4.00E	---	159	6.26	739	29.09	560	340
6.50-16	6	TT		14.0	0.55	4.50E	---	173	6.81	761	29.96	615	310

Implement I3



TR36

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
	8											3250	160
500/60-22.5	12		TL	20.0		16	---	476	18.74	1170	46.06	4125	240
	16											4875	320
550/60-22.5	12		TL	20.0		16.00DC	---	550	21.65	1238	48.74	4500	280
	16											5450	280
	8											3450	130
600/50-22.5	12		TL	20.0		20	---	576	22.68	1170	46.06	4375	200
	16											5150	260

Drive Bias G1



Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
5.00-12	6		TL	13.0	0.51	3.00D	---	127	5.00	528	20.79	285	360
6.00-16	6		TL	25.0	0.98	4.50E	---	165	6.50	745	29.33	426	290

Bias IMP



TR41

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
	10											1500	400
10/75-15.3	12		TL	9.0	0.35	9	---	264	10.39	760	29.92	1700	470
	14											1900	550
	10											1950	340
11.5/80-15.3	12		TL	10.0	0.39	10	---	290	11.42	845	33.27	2180	410
	14											2430	470
12.5/80-15.3	14		TL	10.0	0.39	10	---	307	12.09	889	35.00	2650	440



AGRICULTURAL TIRE

Drive Bias R1



TR17

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
13.6-24	6	TT		35.0	1.38	W12	W11、DW12	345	13.58	1210	47.64	1340	160
	8											1545	200
	10											1790	250
14.9-24	6	TT		33.0	1.30	W13	W12、DW12	378	14.88	1265	49.80	1510	140
	8											1760	180
	10											1990	230



TR59

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
11.2-24	6	TT	TL	33.0	1.30	W10	W9、W10H	285	11.22	1105	43.50	1045	180
	8											1225	240
	10											1380	300
11.2-38	4	TT	TL	30.0	1.18	W10		284	11.18	1459	57.44	950	120
	4											925	100
	6											1215	150
13.6-24	6	TT	TL	36.5	1.44	W11	W12	345	13.58	1210	47.64	1400	190
	8											1090	100
	4											1360	140
14.9-24	6	TT	TL	37.0	1.46	W12	W13	378	14.88	1265	49.80	1600	180
	8												



TR66/R1

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
11.2-24	6	TT		25.0	0.98	W10	---	285	11.22	1105	43.50	1045	180
	8											1225	240
11.2-38	6	TT		25.0	0.98	W10	---	285	11.22	1448	57.01	950	120
	8											1150	180
	10											1350	250
13.6-24	6	TT		25.0	0.98	W12	---	245	9.65	1210	47.64	1340	160
	8											1545	200
14.9-24	6	TT		26.0	1.02	W13	---	378	14.88	1265	49.80	1510	140
	8											1760	180



TRACTOR



IMPLEMENT



IRRIGATION

AGRICULTURAL TIRE

Drive Bias R2



TR49

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
11.2-24	6	TT		82.0	3.23	W10	W9, W10H	285	11.22	1205	47.44	1465	210

Irrigation WR1



TR40

Tire Size	Ply Rating	Type		Tread Depth		Standard Rim	Available Rim	Inflated Dimensions				Load Capacity	
		TT	TL	mm	inch			Overall Width		Overall Diameter		Max Load kg	Inflation Kpa
								mm	inch	mm	inch		
11.2-24	4		TL	28.0	1.10	10.00	---	285	11.22	1097	43.19	750	190
14.9-24	4		TL	30.5	1.20	13.00	---	366	14.41	1260	49.61	1000	80

AGRICULTURAL WHEEL RIM





AGRICULTURE WHEEL RIM

wheel size	tyre size (alternative)	numbers	Bolt hole			Center hole diameter	Offset	thickness	
			Diameter	PCD				Rim	Disc
4.00Ex15	5.00-15	5	15	140	96	25	3.5	5	
3.00Dx16	4.00-16	5	20	140	94	27	3.5	6	
4.00Ex16	5.00-16	4	17	127	92.2	10	3.5	5	
4.00Ex16	5.00-16	5	15	140	98	25	3.5	5	
4.00Ex16	5.00-16	5	17	140	98	25	3.5	5	
4.00Ex16	5.00-16	5	20	140	94	27	3.5	6	
4.50Ex16	6.50-16	6	20	152	112	25	3.5	5	
4.50Ex16	6.50-16	6	14	180	141	25	4	6	
4.50Ex16	6.50-16	5	15	140	92	15	4	6	
4.50Ex16	6.50-16	6	17	161	102	65	4	6	
4.50Ex16	6.50-16	6	17	161	102	25	3.5	6	
4.50Ex16	6.50-16	5	15	140	92	15	4	6	
5.50Fx16	7.50-16	6	19	152	112.7	0	4	8	
5.50Fx16	7.50-16	5	17.5	205	156	15	4	8	
5.50Fx16	7.50-16	6	20	152.4	110	60	3.5	6	
5.50Fx16	7.50-16	5	15	140	92	10	4	6	
5.50Fx16	7.50-16	6	17	180	141	36	4	6	
5.50Fx16	7.50-16	6	15	180	141	36	4	6	
5.50Fx16	7.50-16	6	15	152.4	117.4	0	4	6	
5.50Fx16	7.50-16	6	17	161	102	50	4	5	
5.50Fx16	7.50-16	6	14.5	161	100.5	30	4	5	
5.50Fx16	7.50-16	6	14	180	141	25	4	5	
9.75x16.5	12.5-16.5	6	13	152.4	117.5	8	4	10	
W9x18	11.2-18	6	17	161	102	136	4	8	
5.50Fx20	7.50-20	6	19	180	141	10	4	8	
5.50Fx20	7.50-20	6	15	180	141	30	4	8	
5.50Fx20	7.50-20	5	19	175	136	25	4	7	
5.50Fx20	7.50-20	6	19	180	141	10	4	8	
5.50Fx20	7.50-20	5	19	175	136	25	4	7	
5.50Fx20	7.50-20	6	15	180	141	46	4	8	
5.50Fx20	7.50-20	6	19	152	117.7	10	8	4	
5.50Fx20	7.50-20	6	15	180	141	10	8	4	
W7x20	8.3-20	6	17	161	102	65	3.5	8	
W7x20	8.3-20	6	17	161	102	5	3.5	8	
W7x20	8.3-20	6	15	161	102	50	3.5	8	
W7x22	8.3-22	6	14.5	152.4	117.6	21	3.5	8	
W7x22	8.3-22	6	15.75	141	95	62.25	3.5	8	
W7x24	8.3-24	6	17	161	100	15	3.5	8	
W7x24	8.3-24	8	16.5	330	290.5	161.6	4	9	
W7x24	8.3-24	6	17	285	250	20	3.5	10	
W7x24	8.3-24	8	17.5	203.2	152.4	40	4	10	
W7x24	8.3-24	6	17	285	250	123.5	4	8	
W7x24	8.3-24	6	17	165	130	54	4	8	
W7x24	8.3-24	8	19	203.2	152.6	5	3.5	8	
W7x24	8.3-24	6	18	165	130	54	3.5	8	
W7x24	8.3-24	6	18	165	130	5	3.5	8	
W8x24	9.5-24	6	20	205	161	68.7	4	9	
W8x24	9.5-24	8	17	330	290.5	174.3	4	9	
W8x24	9.5-24	8	17.5	203.2	152.4	40	4	10	
W8x24	9.5-24	8	17	330	290.5	174.3	4	9	
W8x24	9.5-24	6	18.8	165	120	1	3.5	8	
W10x24	11.2-24	8	17	203.2	151	4	4	8	
W10x24	11.2-24	6	18.8	165	120	76	4	8	
W10x24	11.2-24	8	17	330	290.5	26	4	9	
W10x24	11.2-24	5	17	140	92	10	4	8	
W10x24	11.2-24	6	18.8	165	120	0	4	8	
W10x24	11.2-24	8	17	335	290.5	213	4	9	
W10x24	11.2-24	8	21	275	221	21	4	9	
W10x24	11.2-24	8	17.5	203.2	152.4	31	4	10	
W10x24	11.2-24	8	17.5	203.2	152.4	83	4	10	
W10x24	11.2-24	8	17	330	290.5	26	4	9	
W10x24	11.2-24	8	17	330	290.5	81	4	8	
W10x24	11.2-24	8	19	275	221	30.5	4	8	
W10x24	11.2-24	8	17	330	290.5	48.5	4	8	
W10x24	11.2-24	8	19	275	221	1.5	4	8	
W10x24	11.2-24	8	17	330	290.5	30.5	4	8	
W10x24	11.2-24	6	17	285	250	42.5	4	8	
W10x24	11.2-24	8	17	330	290.5	4	4	8	
W10x24	11.2-24	8	19	275	221	26	4	8	
W10x24	11.2-24	8	17	330	290.5	4	4	8	
W10x24	11.2-24	8	19	203.2	152.6	4	4	8	
W10x24	11.2-24	8	19	275	221	4	4	8	
W10x24	11.2-24	8	18	165	130	63.5	4	8	
W12x24	13.6-24	8	17	330	290.5	26	4	9	
W12x24	13.6-24	8	21	275	221	9	4	10	
W12x24	13.6-24	8	17	330	290.5	26	4	9	
W12x24	13.6-24	8	16.5	330	290	87	4	10	
W12x24	13.6-24	8	21	275	221	87	4	10	
W12x24	13.6-24	8	16.5	330	290	87	4	10	
W12x24	13.6-24	8	17	330	290.5	101	4	8	
W12x24	13.6-24	8	17	330	290.5	65	4	12	
W12x24	13.6-24	8	18.8	203.2	152.6	24	4	8	
W12x24	13.6-24	8	17	330	290.5	4	4	9	
W12x24	13.6-24	8	17	330	290.5	55.4	4	9	
W12x24	13.6-24	8	17	330	290.5	90.4	4	9	

Tractor Series

Tractor Series



AGRICULTURAL WHEEL RIM

Tractor Series

W12x24	13.6-24	8		18.8	203.2	152.6	24		4	8
W12x24	13.6-24	8		17	330	290.5	39		4	9
W12x24	13.6-24	8		18.8	203.2	152.6	26		4	8
W12x24	13.6-24	8		17	330	290.5	39		4	9
W12x24	13.6-24	8		17.2	203.2	152.4	106.4		4.5	10
W13x24	14.9-24	8		18.8	203.2	152.6	26		4	8
W13x24	14.9-24	8		26	190	145	90		4	14
W11x26	12.4-26	8		17	330	290.5	31.5		4.5	8.3
W11x26	12.4-26	8		17	330	290.5	104.7		4.5	9
W11x26	12.4-26	8		17	330	290.5	25		4.5	9
W12x26	13.6-26	10		24	275	221	40		4	10
W13x26	14.9-26	8		17	330	290.5	26		5	9
W13x26	14.9-26	8		17	330	290.5	47		4.5	9
W13x26	14.9-26	8		17	330	290.5	47		4.5	9
W13x26	14.9-26	8		17	330	290.5	178		4.5	9
W13x26	14.9-26	8		17	330	290.5	43		5	10
W13x26	14.9-26	8		17	330	290.5	21		5	10
W13x26	14.9-26	10		21	335	281.5	21		5	10
W13x26	14.9-26	8		17	330	290.5	26		5	9
W13x26	14.9-26	12		17	535	500	13		5	8
W15x26	16.9-26	10		21	335	105	21		5	10
W10x28	11.2-28	8		17	203.2	151.3	4		4	10
W10x28	11.2-28	6		18.8	165	120	76		4	10
W10x28	11.2-28	6		18.8	165	120	76		4	10
W10x28	11.2-28	6		18.8	165	120	100		4	10
W10x28	11.2-28	8		17	330	290.5	26		4	9
W10x28	11.2-28	8		18.8	203.2	152.4	50		4	8
W10x28	11.2-28	8		21	275	221	16.5		4	9
W10x28	11.2-28	8		17	330	290.5	26		4	9
W10x28	11.2-28	8		18.8	203.2	152.6	4		4	8
W10x28	11.2-28	8		20	203.2	163.5	75		4	8
W10x28	11.2-28	8		17	330	290.5	64.5		4	9
W10x28	11.2-28	8		20	203.2	163.5	249		4	8
W10x28	11.2-28	10		21	335	281.5	54		4	9
W10x28	11.2-28	8		20	203.2	163.5	6		4	8
W10x28	11.2-28	8		18.8	203.2	152.6	36		4	8
W10x28	11.2-28	10		24	335	281	206		4	10
W11x28	12.4-28	8		17	203.2	151.3	4		4	10
W11x28	12.4-28	8		21	210	140.3	85.5		5	12
W12x28	13.6-28	8		17	203.2	151.3	4		4	10
W12x28	13.6-28	10		24	275	221	40		4	10
W12x28	13.6-28	8		17	330	290.5	102		5	9
W12x28	13.6-28	8		20	203.2	152.4	30		5	10
W13x28	14.9-28	10		23	335	281	30		4	9
W13x28	14.9-28	10		23	335	281	155.1		4	10
W13x28	14.9-28	10		23	335	281	190		5	10
W13x28	14.9-28	8		20	203.2	163.5	190.1		5	10
W13x28	14.9-28	8		17	330	290.5	21.5		5	9
W13x28	14.9-28	8		20	203.2	152.4	30		5	10
W13x28	14.9-28	10		21	335	281.5	21		5	9
W13x28	14.9-28	10		23	335	281	10		10	4.5
W14x28	16.9-28	8		20	203.2	152.4	23.3		5	9
W15x28	16.9-28	10		23	335	281	180		4	10
W15x28	16.9-28	10		23	335	281	31		5	9
W15x28	16.9-28	10		23	335	281	215		5	10
W15x28	16.9-28	10		21	335	281.5	36		5	10
W12x30	13.6-30	8		21	203.2	152.4	149.5		5	10
W12x30	13.6-30	8		21	203.2	152.4	30		5	10
W12x30	13.6-30	8		19	203.2	150.1	20		5	10
W12x30	13.6-30	8		17.5	203.2	152.4	70.5		5	12
W12x30	13.6-30	8		24	250	199	0		4	10
W12x30	13.6-30	8		21.4	203.2	152.6	75		4	10
W12x30	13.6-30	8		21	203.2	152.4	20		5	10
W12x30	13.6-30	8		32	222.25	145	70		5	10
W12x30	13.6-30	8		19	203.2	150.1	20		5	10
W14x30	16.9-30	8		19	203.2	150.1	70		5	10
W14x30	16.9-30	8		17.5	203.2	152.4	70.5		5	12
W14x30	16.9-30	8		19	203.2	152.4	58		5	12
W14x30	16.9-30	8		19	203.2	152.4	193.3		5	12
W14x30	16.9-30	8		21.4	203.2	152.6	77		4	10
W14x30	16.9-30	8		21	2056	150	70		5	7
W14x30	16.9-30	8		9	203.2	150.1	70		5	10
W15x30	16.9-30	8		19	203.2	152.4	3.5		5	12
W15x30	16.9-30	10		23	335	281	215.4		5	12
W15x30	16.9-30	8		21.5	203.2	152.4	206.5		5	12
W15x30	16.9-30	8		19	203.2	152.4	165.5		5	12
W15x30	16.9-30	10		23	335	281	13		5	14
W15x30	16.9-30	10		23	335	281	19		5	14
W15x30	16.9-30	10		23	335	281	13		5	14
W15x30	16.9-30	10		24	335	281	45		5	14
W15x30	16.9-30	12		26	425	371.5	45		5	14
W15x30	16.9-30	10		24	335	281	13		5	14
W16x30	18.4-30	8		21.5	203.2	152.4	220		5	12
W16x30	18.4-30	8		21.5	203.2	152.4	149.5		5	12
W16x30	18.4-30	8		19	203.2	152.4	58		5	12
W16x30	18.4-30	8		19	203.2	152.4	218.75		5	12
W8x32	9.5-32	6		19	180	141	60		4	10

Tractor Series



TRACTOR



IMPLEMENT



IRRIGATION

AGRICULTURAL WHEEL RIM

Tractor Series

W8c32	9.5-32	6	19	200	125	25	4	10
W8c32	9.5-32	8	21.5	275	221	15	4	10
W8c32	9.5-32	8	16.5	330	290.5	114.5	4	10
W8c32	9.5-32	8	19	330	290.5	113	4	10
W8c32	9.5-32	10	21.5	335	281.5	40	4	10
W8c32	9.5-32	6	19	180	141	60	4	10
W10c32	11.2-32	8	17	203.2	151	4	5	10
W10c32	11.2-32	8	19	203.2	150.1	20	5	10
W10c32	11.2-32	8	32	222.25	164	30	4	10
W10c32	11.2-32	8	20	203.2	152.4	31	4	9
W10c32	11.2-32	8	19	203.2	150.1	20	5	10
W10c32	11.2-32	5	19	175	136	18	5	10
W10c32	11.2-32	8	19	330	290.5	68	4	10
W10c32	11.2-32	8	19	330	290.5	68	4	10
W10c32	11.2-32	8	23.5	275	221	45	4	10
W10c32	11.2-32	8	21.5	275	221	53	5	10
W10c32	11.2-32	10	21.5	335	281.5	48	5	10
W10c32	11.2-32	8	20	203.2	152.6	30	5	10
W11c32	12.4-32	8	19.5	203.2	152.6	25.4	5	9
W15c34	16.9-34	8	19	203.2	150.1	70	5	10
W15c34	16.9-34	8	22	275	221	20	5	12
W15c34	16.9-34	8	24	250	199	116	6	12
W15c34	16.9-34	8	21	210	140.3	85.5	5	12
W15c34	16.9-34	8	19	203.2	152.4	57.5	5	10
W15c34	16.9-34	8	19	203.2	152.4	204	5	10
W15c34	16.9-34	8	19	203.2	150.1	70	5	12
W15c34	16.9-34	6	19	410	355	70	5	12
W15c34	16.9-34	8	21	203.2	152.4	23	5	12
W15c34	16.9-34	8	23	280	220.5	23	5	12
W15c34	16.9-34	8	21	275	221.3	20	5	12
W15c34	16.9-34	8	21	203.2	152.4	266.5	5	12
W15c34	16.9-34	8	23	280	220.5	252.5	5	12
W15c34	16.9-34	8	23	280	220.5	252.5	5	12
W15c34	16.9-34	10	26	335	281.5	77	5	12
W15c34	16.9-34	8	21	203.2	152.4	23	5	12
DW15c34	16.9-34	8	19	203.2	152.6	18	5	10
DW15c34	16.9-34	8	21.4	203.2	152.6	75	5	12
DW15c34	16.9-34	10	24	335	281.5	314.5	5	12
W11c36	12.4-36	10	24	335	282	236.7	4	10
W11c36	12.4-36	8	19	203.2	152.4	79	4	12
W10c38	11.2-38	8	17	203.5	152.4	44	4	6
W10c38	11.2-38	10	23	335	282	273	5	12
W10c38	11.2-38	10	26	335	281.5	100	4	12
W10c38	11.2-38	8	21	275	221	112.5	4	10
W10c38	11.2-38	8	21	203.2	140	180	5	12
W10c38	11.2-38	10	22	335	282	82	5	12
W10c38	11.2-38	12	22	426	371	108	5	12
W10c38	11.2-38	8	18	330	292	82	5	12
W10c38	11.2-38	10	22.5	335	282	100	5	12
W10c38	11.2-38	8	18	405	362	52	5	12
W10c38	11.2-38	10	23	335	281	152	5	12
W10c38	11.2-38	10	21.5	335	281	152	5	12
W10c38	11.2-38	8	22	275	220.8	198	5	12
W10c38	11.2-38	10	23	335	282	202	5	12
W10c38	11.2-38	10	22	335	282	108	5	12
W10c38	11.2-38	8	18	405	362	100	5	12
W11c38	12.4-38	8	21	203.2	152.4	16	4	12
W11c38	12.4-38	8	19	203.2	150.1	140	4	12
W11c38	12.4-38	8	20	224	180	98	4	10
W11c38	12.4-38	8	32	275	214	259.8	5	6
W11c38	12.4-38	8	24	250	199	76.5	4	6
W11c38	12.4-38	8	21.4	203.2	152.6	75	4	12
W11c38	12.4-38	8	21	295	240	236	5	10
W11c38	12.4-38	8	19	180	180	33.2	5	10
W11c38	12.4-38	8	21	335	281.5	16	5	12
W11c38	12.4-38	8	21	335	281.5	16	5	12
W11c38	12.4-38	8	23	280	220.5	91.5	4	12
W11c38	12.4-38	8	23	280	220.5	200.5	4	12
W11c38	12.4-38	8	21.5	203.2	141	30	5	12
W11c38	12.4-38	8	24	275	221	3	5	12
W12c38	13.6-38	8	19	203.2	150.1	21.2	5	10
W12c38	13.6-38	8	19	203.2	150.1	158	5	10
W12c38	13.6-38	8	19	203.2	150.1	21.2	5	10
W12c38	13.6-38	8	21	203.2	152.4	30	5	12
W12c38	13.6-38	8	23	280	220.5	30	5	12
W12c38	13.6-38	8	21	203.2	152.4	30	5	12
DW12c38	13.6-38	8	20.5	203.2	152.4	69.5	5	10
DW12c38	13.6-38	8	20.5	203.2	152.4	213	5	10
DW12c38	13.6-38	8	20.5	203.2	152.4	69.5	5	10
W14c38	15.5-38	8	21.4	203.2	152.6	75	5	12
W15c38	16.9-38	8	19	203.2	150.1	20	5	12
W15c38	16.9-38	8	23	295	240	96	5	12
W15c38	16.9-38	12	22	404	355	185	5	12
W15c38	16.9-38	8	19	203.2	150.1	120	5	12
W15c38	16.9-38	8	19	203.2	150.1	20	5	12
W15c38	16.9-38	8	23	280	220.5	169.5	5	12
W15c38	16.9-38	10	26	335	281.5	26	5	12

Tractor Series



AGRICULTURAL WHEEL RIM

W15x38	16.9-38	10	26	335	281.5	26	5	12
W15x38	16.9-38	10	26	335	281.5	5.5	5	12
W15x38	16.9-38	10	26	335	281.5	46.5	5	12
W15x38	16.9-38	8	21	203.2	152.4	22	5	12
W15x38	16.9-38	10	26	335	281.5	26	5	12
W15x38	16.9-38	10	26	335	281.5	26	5	12
W15x38	16.9-38	10	26	335	281.5	21	5	12
W15x38	16.9-38	10	26	335	281.5	144	5	12
W15x38	16.9-38	10	26	335	281.5	16	5	12
W15x38	16.9-38	8	21	203.2	152.4	88	5	12
W16x38	18.4-38	8	21	203.2	141	110	5	12
W16x38	18.4-38	8	21	275	223	250	5	12
W16x38	18.4-38	8	23	295	240	96	5	12
W16x38	18.4-38	10	22	480	421.5	94	5	12
W16x38	18.4-38	10	26	355	281.5	115	5	12
W16x38	18.4-38	8	21	295	240	19	5	12
W16x38	18.4-38	8	21	295	240	173	5	12
W16x38	18.4-38	8	21	275	221	44	6	16
W18x38	20.8-38	10	21	480	421.5+0.5	376.5	5	12
W18x38	20.8-38	10	26	335	281	96	5	12
W18x38	20.8-38	10	26	335	281	146	5	12
W18x38	20.8-38	10	26	335	281.5	115	5	12
W18x38	20.8-38	10	26	335	281.5	46.5	5	12
W18x38	20.8-38	10	26	335	281.5	205.5	5	12
W15x42	16.9-42	8	24	275	221	106	6	14
W16x42	18.4-42	8	17.5	203.2	150.1	92.5	5	12
W16x42	18.4-42	10	26	335	281	150	6	14
DW16x42	18.4-42	10	24	335	281.5	38	5	12
DW16x42	18.4-42	10	24	335	281.5	14	5	12
DW16x42	18.4-42	10	24	335	281.5	177	5	12
W18x42	20.8-42	10	23	335	281.5	190.5	6	16
W18x42	20.8-42	10	23	335	281	352	6	18
W18x42	20.8-42	10	26	335	281	167.5	6	18
W18x42	20.8-42	12	26	425	371	284.5	6	16
W18x42	20.8-42	10	26	335	281	240	6	16
W18x42	20.8-42	10	26	335	281	240	6	16
DW20x42	23.1-42	10	23	335	281	310	6	18
DW20x42	23.1-42	12	26	425	371	50	6	16
W7x48	8.3-48	8	21.5	203.2	152.6	43	6	12
W7x48	8.3-48	10	26	335	281	145	6	14
W7x48	8.3-48	8	21.5	203.2	152.6	165	5	12
W8x48	9.5-48	8	24	250	199	18	5	12
W8x48	9.5-48	8	19	203.2	150.1	130	5	12
W8x48	9.5-48	8	23	203.2	152.4	190	5	12
W10x48	11.2-48	8	20	203.2	150.5	48	5	12
W10x48	11.2-48	8	23	275	221	150	5	12
W10x48	11.2-48	8	21.5	203.2	152.6	82	5	12
W10x48	11.2-48	10	25	335	281	94	5	12
W10x48	11.2-48	12	23	404	352	21	5	12
W10x48	11.2-48	8	21.5	203.2	152.6	40	5	12
W10x48	11.2-48	10	24	335	281.5	308	5	12
W10x48	11.2-48	10	26	335	281.5	40	5	12
W13x48	14.9-48	10	26	335	282	110	6	12
W13x48	14.9-48	10	24	335	282	83	6	14
W13x48	14.9-48	8	21	295	240	110.4	6	12
W13x48	14.9-48	8	22	275	222	183	6	14
W13x48	14.9-48	10	24	335	282	180	6	14
W13x48	14.9-48	10	26	335	282	133	6	12
W13x48	14.9-48	8	22	275	222	183	6	14
W13x48	14.9-48	10	26	335	282	31	6	14
W13x48	14.9-48	10	22	480	421	245	6	14
W13x48	14.9-48	8	21.5	203.2	152.6	395	5	12
W13x48	14.9-48	10	24	335	282	133	6	14
W13x48	14.9-48	8	20	275	222	110	6	12
W13x48	14.9-48	12	24	814	768	98	6	12
W13x48	14.9-48	10	24	814	768	98	6	12
W10x54	11.2-54	8	24	250	199	193	5	12
W10x54	11.2-54	8	19	223	180	123	5	12
W10x54	11.2-54	8	20	275	222	62	5	12
W10x54	11.2-54	10	24	335	282	133	5	12
W10x54	11.2-54	10	24	335	282	185	5	12
W10x54	11.2-54	8	21	203.2	152.4	20	5	13
W10x54	11.2-54	8	21.5	203.2	152.6	82	5	12
W11x54	12.4-54	10	24	335	282	221.5	5	14

Tractor Series

Wheel Rim



Tractor Series



TRACTOR



IMPLEMENT



IRRIGATION

AGRICULTURE WHEEL RIM

Implement Series

wheel size	tyre size (alternative)	numbers	Bolt hole			Center hole diameter	Offset	thickness	
			Diameter	PCD				Rim	Disc
10Lx15	11-15	5	17.5	205	156	6.5	4	6	
8.00x15.3	10-15	6	17	162	120	110	4	6	
9.00x15.3	10-15	5	17.5	205	158.5	0	4	6	
9.00x15.3	10-15	5	15	140	110	50	4	6	
9.00x15.3	10-15	6	21.5	205	153	118.4	4	8	
9.00x15.3	10-15	6	17	162	120	114.3	4	8	
9.00x15.3	10-15	6	17	162	120	114.3	4	8	
9.00x15.3	10-15	5	17.5	205	152	6.5	4	6	
9.00x15.3	10-15	5	17.5	205	158.5	0	4	6	
9.00x15.3	10-15	5	17	205	160	0	4	6	
9.00x15.3	10-15	5	21	155	122	5.2	4	6	
DK9-18	11.2-18	8	17	203.2	152.4	131.6	5	6	
DK9-18	11.2-18	8	17	203.2	152.4	97	5	6	
DK9-18	11.2-18	8	17	203.2	152.4	131.6	5	6	
DK9-18	11.2-18	8	17	203.2	152.4	97	5	6	
DK9-18	11.2-18	8	17	203.2	152.4	131.6	5	6	
DK9-18	11.2-18	8	17	203.2	152.4	97	5	6	
DK9-18	11.2-18	8	17	203.2	152.4	131.6	5	6	
DK9-18	11.2-18	8	17	203.2	152.4	97	5	6	
W8x20	9.5-20	8	17	330	290.5	155.6	4	8	
W8x20	9.5-20	8	17	330	290.5	45	4	8	
W8x20	9.5-20	8	17	330	290.5	0	4	8	
W8x20	9.5-20	6	17	180	141	0	3.5	6	
W8x20	9.5-20	6	17	180	141	20	4	8	
W8x20	9.5-20	8	23	330	290	30	4	8	
13.00x20	16/70-20	10	23	335	281.5	22.75	6	12	
DK14-20	16/70-20	6	20	230	180	130.5	5	8	
DK14-20	16/70-20	6	20	230	180	199.5	5	8	
W10x24	11.2-24	8	17	330	290.5	0	4	10	
W10x24	11.2-24	10	21	335	280	0	4	10	
W10x24	11.2-24	8	19	330	290.5	56.5	4	9	
W10x24	11.2-24	6	17	162	120	200	4	10	
W10x24	11.2-24	6	17	280	141	52	4	10	
W12x24	13.6-24	10	21	335	280	156.5	4	12	
W12x24	13.6-24	10	21	335	281	61	5	12	
W14Ax24	15-24	8	38	210	145	70.8	6	8-6	
W14Ax24	15-24	8	38	210	145	163.8	6	8-6	
W14Ax24	15-24	8	38	162	145	118	6	8-8	
W14Ax24	15-24	8	20.5	210	140	124.5	6	8	
DT14-24	15-24	12	17.5	535	500.5	5	5		
DT14-24	15-24	8	23	240	172/160	8	5	8-6	
DT14-24	15-24	8	23	240	160/172	8	5	8-6	
DT14-24	15-24	8	23	210	139.6/154.6	8	5	8-6	
DT14-24	15-24	8	32	210	145/160	8	5	8-6	
DT14-24	15-24	8	22	240	160.5	10	5	10-6	
DT14-24	15-24	8	22	240	160.5	10	5	10	
W15x24	16.9-24	8	21	275	221	119.5	4	12	
W15x24	16.9-24	8	22	275	221	266	5	12	
W15x24	16.9-24	10	24.5	275	221	19	5	12	
DW15x24	16.9-24	8	22	275	221	266	5	12	
W17Ax24	19.5L-24	8	32	210	145	145	6	8-6	
W17Ax24	19.5L-24	8	22	210	145	151	6	8-6	
DW20x26	23.1-26	8	21	275	221	0	6	14	
DW20x26	23.1-26	8	21.5	275	221	60	6	16	
DW20x26	23.1-26	8	20	275	221	36	6	14	
DW20x26	23.1-26	8	20	275	221	37	6	14	
DW25x26	28L-26	8	20.5	275	221	317.5	6	16	
DW25x26	28L-26	8	20.5	275	221	66	6	16	
DW25x26	28L-26	8	21.5	275	221	0	6	16	
W8x28	9.5-28	8	19	330	290.5	18	4	10	
W10x28	11.2-28	8	18	330	290.5	30	4	10	
W10x28	11.2-28	8	21.5	275	221	60	4	10	
W10x28	11.2-28	10	21	335	281.5	50	4	9	
W10x28	11.2-28	8	20	190	145	33	4	12	
W10x28	11.2-28	8	21.5	275	221	381	4	10	
4.50Ex29	6.00-29	6	19	161	115	70.8	3.5	10	
W16x30	18.4-30	8	22	203.2	152.4	4	5	10	
DW16x30	18.4-30	8	26	222.25	164	75	5	13.5	
DW16x30	18.4-30	8	20	275	221	60	5	14	
DW16x30	18.4-30	8	21	275	221	75	4	13	
DW16x30	18.4-30	8	21	275	221	75	4	13	
DW16x30	18.4-30	8	21	275	221	75	4	13	
DW20x32	23.1-32	10	24.5	275	221	19	6	16	
DW27x32	28.4-32	10	24	335	281	79	6	16	
DW27x32	28.4-32	10	24	335	281	124	6	16	
DW27x32	28.4-32	10	22	335	281	101	6	16	
DW15x34	16.9-34	8	20	275	200.5	110	5	12-14	
W16x38	18.4-38	8	21	275	221	165	5	16	
W16x38	18.4-38	8	21	275	221	20	5	12	
W18x38	20.8-38	10	25	530	476	595.5	6	18	
W18x38	20.8-38	10	24.5	275	221	150	5	16	



Wheel Rim

Implement Series





AGRICULTURE WHEEL RIM

wheel size	tyre size (alternative)	Bolt hole			Center hole diameter	Offset	thickness	
		numbers	Diameter	PCD			Rim	Disc
W8x20	9.5-20	8	16.7	203.2	152.4	54.7	4	5
DW10x20	11.2-20	8	16.7	203.2	152.4	50.8	5	6
DW10x20	11.2-20	9	16.7	243.5	203	71.7	4	6
DW11x20	13.6-20	8	16.7	203.2	152.4	52	4	6
DW11x20	13.6-20	8	16.7	203.2	152.4	36	4	6
W8x24	9.5-24	8	16.7	203.2	152.8	50.8	3.5	5
W8x24	9.5-24	8	16.7	203.2	152.4	50.8	3.5	4
W8x24	9.5-24	8	16.7	203.2	152.4	50.8	3.5	5
W8x24	9.5-24	8	16.7	203.2	152.4	60.2	3.5	5
W8x24	9.5-24	8	16.7	203.2	152.4	25.4	3.5	5
W10x24	11.2-24	8	16.7	203.2	152.4	60.2	4	5
W10x24	11.2-24	8	16.7	203.2	152.4	50.8	3.5	5
W10x24	11.2-24	8	16.7	203.2	152.4	40	4	5
W10x24	11.2-24	8	16.7	203.2	152.4	95.25	3.5	5
W12x24	13.6-24	8	16.7	203.2	152.4	48	4	6
W12x24	13.6-24	8	16.7	203.2	152.4	0	4	6
W12x24	13.6-24	8	16.7	203.2	152.4	70	4	6
W12x24	13.6-24	8	16.7	203.2	152.4	0	4	6
W12x24	13.6-24	8	16.7	203.2	152.4	48	4	6
W12x24	13.6-24	8	16.7	203.2	152.4	12.7	4	6
8.25x22.5	11-22.5	8	16.7	203.2	152.5	9.5	4	5
8.25x24.5	11-24.5	8	16.7	203.2	152.5	50.8	4	5
8.25x24.5	11-24.5	8	16.7	203.2	152.5	50.8	4	5
W10x38	11.2-38	8	16.7	203.2	152.4	44	4	6
W10x38	11.2-38	8	16.7	203.2	152.4	62	4	6

Irrigation Series



Irrigation Series



RM2013 Wanda Plaza, No.968, 128 Memorial Rd, Shanghai, China

TEL: 0086-21-6117 8252

FAX:0086-21-6117 8262

E-mail: sales@tnr-international.com

WEB: www.tnr-international.com